





## 6MP Network IR Water-Proof Turret

### KEY FEATURES

- 6MP ( 3072 × 2048 ) H.265 coding
- Max.resolution: 3072 x 2048
- ICR auto switch, true day / night, ROI coding
- 3D DNR, digital WDR, HLC, BLC, defog
- Manual zoom lens
- 30~50m IR night view distance
- 1CH built-in MIC
- Support smart phone, iPad, remote monitoring
- DC12V/PoE power supply
- IP 67 ingress protection
- Support three streams

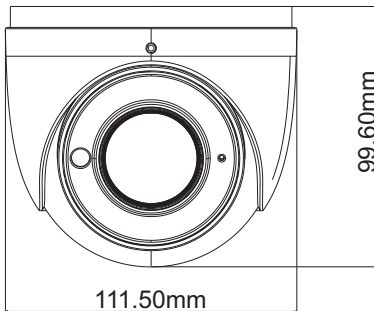

SPECIFICATION	TURVIP-6-VW / TURVIP-6-VG
<b>CAMERA</b>	
Image Sensor	1 / 2.7"
Image Size	3072 x 2048
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Iris Type	Fixed Iris
Min. Illumination	0.0236 lux @F2.0, AGC ON; 0 lux with IR 0.0085 lux @ F1.2, AGC ON; 0 lux with IR
Lens / Mount	2.8 ~ 12 mm @F1.4; Horizontal field of view:92° ~ 32.9° / Φ14
Wide Dynamic Range	Digital WDR
BLC / HLC / Defog	Yes / Yes / Yes
Digital NR	3D DNR
Angle Adjustment	Pan: 0°~360°; Tilt:0°~75°; Rotation: 0°~360°
<b>Image</b>	
Video Compression	H.265 / H.264
H.264 Compression Standard	Main Profile@Leve4.1 High Tier
Resolution	6MP (3072 x 2048) , 4MP (2560 x 1440) 1080P (1920 x 1080), 720P (1280 x 720), D1, CIF, 480 x 240
Main Stream	60Hz: 6MP(1~20fps) / 4MP(1~30fps) / 1080P(1~30fps) / 720P(1~30fps) 50Hz: 6MP(1~20fps) / 4MP(1~25fps) / 1080P(1~25fps)/ 720P(1~25fps)
Sub Stream	60Hz: 720P (1-15fps / D1(1-30fps) / CIF (1~30fps); 50HZ: 720P(1~12fps) / D1(1~25fps) / CIF (1~25fps)
Third Stream	60Hz: D1 / CIF / 480 x 240 (1~30fps) 50HZ: D1 / CIF / 480 x 240 (1~25fps)
Bit Rate	128 Kbps ~ 5 Mbps
Bit Rate Type	VBR / CBR
Audio Compression	G711A / U
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR,etc. adjustable through client software or web browser
ROI	Each ROI to be configured separately
<b>Interfaces</b>	
Network	RJ45
Audio	1CH built-in MIC
<b>Functions</b>	
Remote Monitoring	Web browsing,CMS remote control
Online Connection	Support simultaneous monitoring for up to 3 users; Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, SNMP, 802.1x, UPnP, HTTPs, QoS
Interface Protocol	ONVIF, GB-T/28181-2011
Storage	Network remote storage
Smart Alarm	Motion detection
General function	Watermark, IP address filtering, video mask, heartbeat, password protection
PoE	Yes
IR Distance	30 ~ 50 m
Ingress Protection	IP67
<b>Others</b>	
Power Supply	DC12V/PoE
Power Consumption	< 8W
Operating Environment	- 30°C ~ +60°C (-22°F ~ +140°F) Humidity: less than 95 % non condensing
Weight ( net )	Approx. 0.65KG
Installation	Ceiling mounting; Wall mounting